

HY2713

Portable Fire Telephone Extension

In case of a fire alarm, plug in the telephone extension and it can call the main unit to get in touch with the main unit control room.



Features

- Call the main unit to get in touch with the main unit control room in case of fire
- Plug in the telephone extension and you can hear the ringback tone.
- After the main unit responds, it's ready to talk with the main unit.
- After the conversation is completed, unplug the telephone extension.

General Information

The HY2713 portable fire telephone extension is a supporting device for the fire telephone system. The telephone extension is flexible and convenient to use, with a built-in conversation circuit in the telephone handle; it is small in size, cost-efficient, and easy to install; it has an ABS engineering plastic shell, and the conversation sound is clear. When a fire alarm occurs, insert the telephone extension into the fire telephone jack to call the fire telephone main unit, providing a convenient and fast communication means for the fire scene and being an indispensable communication device in the fire linkage control system.




Specification

- Ambient temperature: 0°C - 40°C
- Relative humidity: $\leq 95\%$
- Ambient noise: $\leq 60\text{dB}$
- Atmospheric pressure: 86kPa - 106kPa
- Frequency range: 300Hz - 3400Hz
- Distortion degree: $< 10\%$
- Working current: Hang-up current $< 0.4\text{mA}$,
- Off-hook current: $< 31\text{mA}$
- Ringing tone level: $\geq 70\text{dB}$
- Weight: approximately 0.22Kg

Wiring and Installation

- This product does not require wiring and installation and is carried by fire duty personnel.

-The System Diagram-

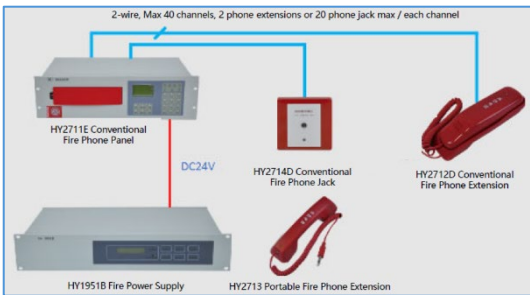

Compatible Models

Model	Description
HY2711E	Conventional Phone Panel
HY2714D	Fire Phone Jack



CALL US
+86 (29) 8110-0119
EMAIL US
Information@hys.cn
Website
www.hy-security.cn
VISIT US
28 Xinxu Ave.
Xi'an, Shaanxi, PRC.